

# Anabec Systems

## Application Notes: newBUILD

### WAYS TO APPLY

- ✓ Airless Sprayer (0.015 spray tip)
- ✓ Roller / Brush

### PACKAGING


- ✓ Available for sale in 5 gallon pails.
- ✓ Available in clear or translucent white (tintable)
- ✓ Ready to use

### PRECAUTIONS

- ✓ Appropriate for new unfinished building materials
- ✓ Not appropriate for application to exterior surfaces
- ✓ Do not allow to freeze  
Packaged and intended for commercial use
- ✓ Completely review the SDS and Product Label prior to use

### Typical Uses

- ✓ Moisture barrier for new unfinished construction material to prevent moisture uptake
- ✓ Suitable as a primer coat

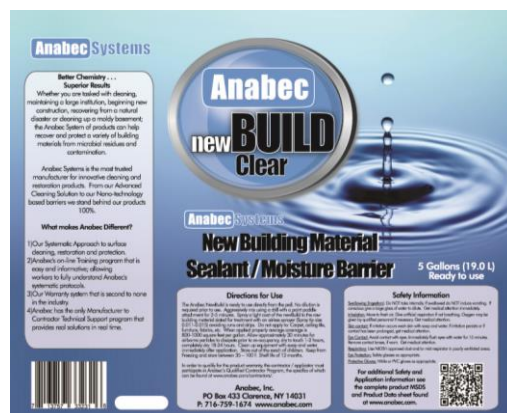

### How it works

- ✓ The newBuild coating is a latex based coating that contains nano-silver.
- ✓ The coating provides a moisture barrier to reduce moisture uptake of the substrate.
- ✓ Silver is a natural antimicrobial.

### Application Notes

- ✓ In order to achieve the best results, Anabec recommends spot cleaning building materials with obvious mold stains, dirt and debris with Anabec's Advanced Cleaning Solution.
- ✓ Allow building materials to fully dry prior to application of coating. Moisture content of the building material should be 16-20%.
- ✓ Prior to product use mix thoroughly using a powered paddle mixer. Mixing times may vary based on mixer power and product settling.
- ✓ If adding any tint, do so during the mixing process and mix thoroughly to ensure color consistency.
- ✓ For best results apply with an Airless Paint Sprayer using tip size 0.015. Product gets an estimated 800-1000 square foot per gallon of coverage, based on substrate profile.
- ✓ When applying with brush / roller coverage may be less.
- ✓ Product is dry to touch in 30-60 minutes, completely dry in 18-24 hours.
- ✓ Clean up equipment with soap and water.

For more information: [www.anabec.com](http://www.anabec.com)